Very Well Connected™

INSTALLATION INSTRUCTIONS

Product	**Revision**	**Form**
CFH Keyboard Tray 7160-0180	Rev. A	INST-493 **Printing Spec:** PS-001

The CFH1 Keyboard Tray (7160-0180) is a keyboard mount that can be used to hold just about any size keyboard. The keyboard tray has a hole pattern that matches the current Panasonic keyboard that is used with the PDRC display. There are strips of VHB foam tape located in the hardware bag for customers that choose to use the keyboard tray with keyboards other than Panasonic.

Attaching a Panasonic or TG3 Keyboard to the Keyboard Tray:

Attach the Panasonic keyboard to the keyboard tray assembly with the (8) M3 x 8MM flat head machine screws found in hardware bag 7120-0513.

Attach the TG3 keyboard to the keyboard tray assembly with the (4) 8-32unc x 3/8 flat head machine screws found in hardware bag 7120-0513.

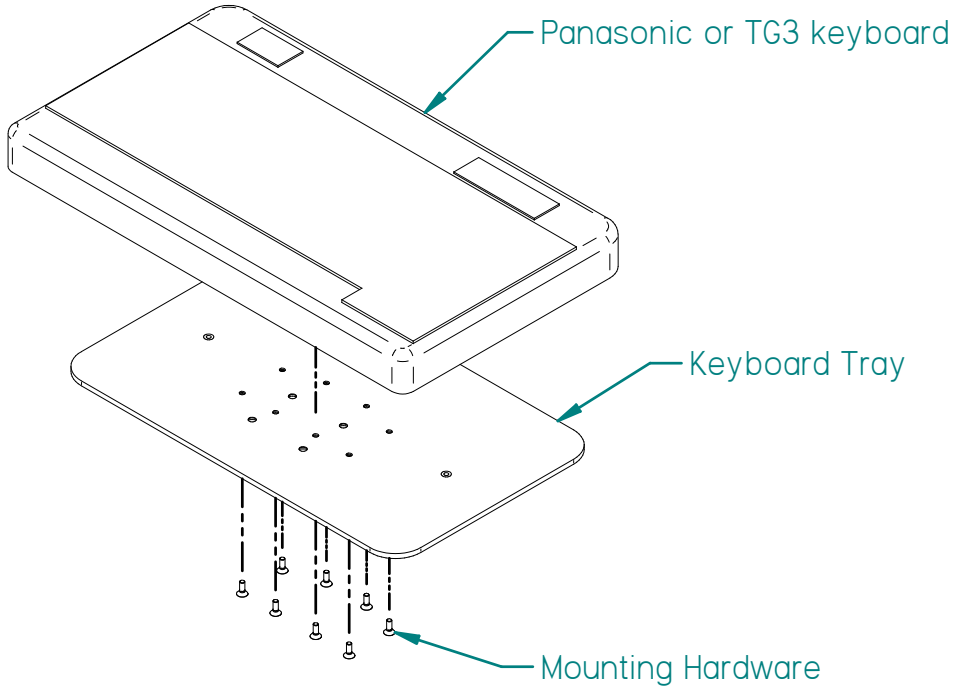

Product Mounting Disclaimer
Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.

Attaching a universal Keyboard to the Keyboard Tray:

Attach the keyboard to the keyboard tray with the 1" x 2" strips of VHB foam tape found in hardware bag 7120-0513.

1. **Without removing the release liners** place the VHB strips on the keyboard tray and place the keyboard on top to make sure the Dual lock is located in the correct place for your application.

2. Once the location of the keyboard has been determined, remove the release liner from one side of the VHB strips and attach the strips to the keyboard tray.

3. Remove the remaining release liners from the top sides of the VHB strips and attach the keyboard.

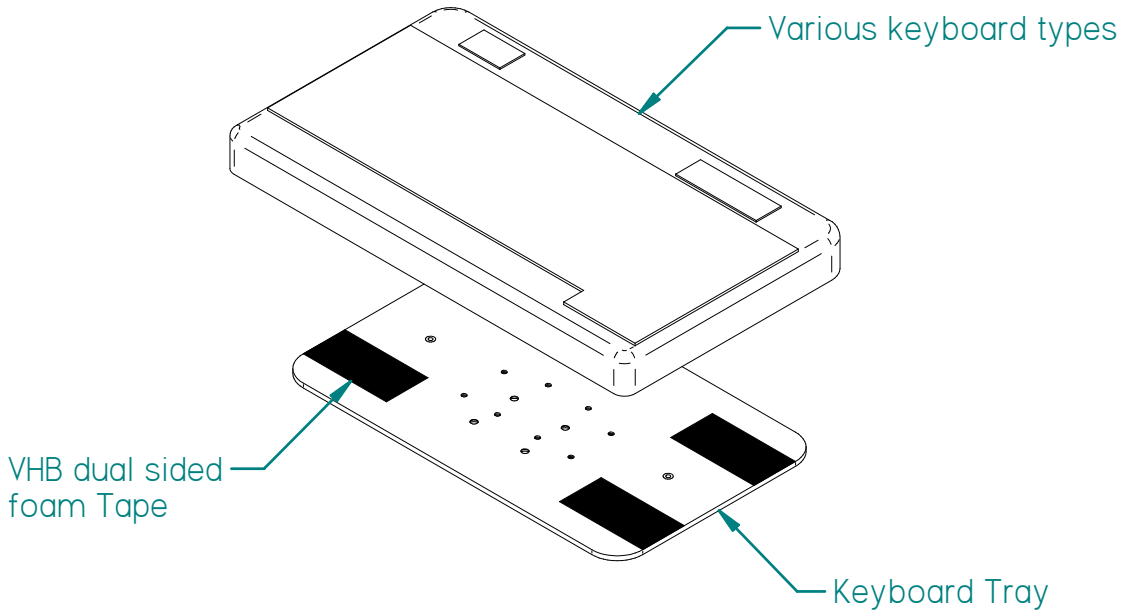

Removing the Keyboard Tray from the base:

The keyboard tray with the keyboard attached can be removed from the base mount by loosening the thumb screws located on the bottom side of the base.

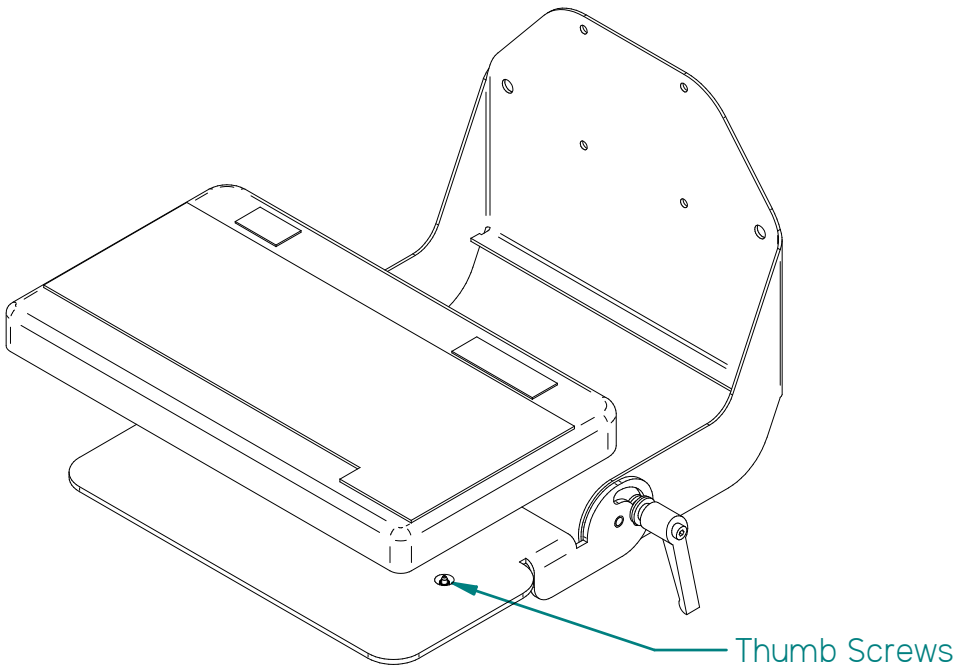

Attaching the keyboard mount to the CFH1 Vehicle Dock:

1. Attach the keyboard mount to the back side of the CFH1 Vehicle Dock (between the Vehicle Dock and Vesa Adapter) with the M4 x 0.7 x 20mm screws that were supplied in hardware bag 7120-0513.